

Canon



CORPORATE SOLUTIONS



 **imageRUNNER®**
C5068 / C5058

meap
POWERED BY

RUN IT IN COLOR.

The imageRUNNER® C5068/C5058 devices are revolutionary digital multifunction solutions that are fast, versatile, and let you add color to standard black-and-white work when needed. Delivering high-speed, black-and-white output at up to 68/58 ppm (letter), respectively, and color output at up to 16 ppm (letter), they easily can handle the workload of several dedicated devices.

The imageRUNNER C5068/C5058 devices offer a complete suite of functionality, including advanced digital copying and Mail Box features, robust finishing options, network printing, standard Color Universal Send, and much more. And, as always, you can trust Canon to deliver performance, quality, and reliability.

MAIN UNIT

Type:	Color Digital Multifunction Imaging System
Imaging System	
Copying Method:	Laser Dry Electrostatic Transfer
Developing System:	Dry Monocomponent/Dual Component Developing System
Memory	
Standard:	1.5GB RAM
Hard Disk Drive:	80GB
Network Interface	
Connections:	10/100Base-TX (RJ-45)
Other Interface:	USB 2.0 (Device), USB 2.0 (Host)
First-copy Time:	5.3 Seconds (B/W) 12.2 Seconds (Color)
Warm-up Time:	8 Minutes and 50 Seconds after Powering On
Copy/Print Speed (B/W, Color):	C5068: Up to 68/16 ppm (Letter) C5058: Up to 58/16 ppm (Letter)
Copy/Scan Resolution:	600 dpi x 600 dpi
Print Resolution:	2400 dpi x 600 dpi Interpolated
Engine Resolution:	600 dpi x 600 dpi
Halftone:	256 Gradations (Continuous-Tone)
Paper Sources	
Standard:	Dual 1,500-sheet Paper Drawers Dual 550-sheet Paper Cassettes 100-sheet Stack Bypass
Optional:	3,500-sheet Paper Deck
Paper Sizes	
Upper Drawers:	Letter
Lower Cassettes:	13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive
Bypass:	13" x 19", 12-5/8" x 17-11/16", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Irregular size (3-15/16" x 5-7/8" to 13" x 19")
Acceptable Paper Weight	
Drawers:	17 lb. Bond to 110 lb. Index
Bypass:	17 lb. Bond to 140 lb. Index
Duplexing:	Standard Automatic Trayless Duplexing (STMT-R to 12" x 18")

Image Reader:	Color Image Reader (Standard)
Acceptable Originals:	Sheet, Book, 3-dimensional Objects (up to 4.4 lb.) 11" x 17"
Max. Original Size:	11" x 17"
Document Feeding Method:	Duplexing Automatic Document Feeder (Standard)
Acceptable Originals:	Statement to 11" x 17"
Paper Capacity:	100 Sheets
Acceptable Paper Weight of Originals:	Simplex: 13 lb. to 32 lb. Bond Duplex: 17 lb. to 32 lb. Bond
Scan Speed:	Up to 70 ipm at 300 dpi (LTR in B/W and Color) Up to 50 ipm at 600 dpi (LTR in B/W and Color)
Dimensions (H x W x D):	46-7/8" x 26-3/4" x 33-1/2"
Weight:	Approx. 498 lb.
Installation Space (W x D):	57-3/4" x 33-1/2" (When Stack Bypass is Extended)
Power Requirements:	120V AC, 60Hz, 16A
Power Consumption:	1.75 kW
Plug:	NEMA 5-20P
Toner (Estimated Yield):	Black: 40,000 Images at 6% Coverage Color: 9,500 Images at 5% Coverage

Copy Features

Multiple Copies:	1 to 9,999
Max. Copy Reservation:	10 Jobs
Color Mode:	Auto Color, Full Color, Black, Single Color, Two Colors
Copy Exposure:	Automatic or Manual (9 Levels) Magnification
Magnification	
Preset Reduction:	25% - 400% (1% Increments) 25%, 50%, 64%, 73%, 78%
Preset Enlargement:	121%, 129%, 200%, 400%
Zoom Mode:	25% - 400% (1% Increments)

Mail Box Features

Max. Mail Boxes Supported:	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes
----------------------------	--

Scan Feature

Network TWAIN Scan:	Standard
Network Scan Utility:	Color Network ScanGear

Color Universal Send (Standard)

Color Mode:	Auto Color Select (Full Color, Grayscale) Auto Color Select (Full Color, B/W) Full Color, Grayscale, B/W
-------------	---

Address Book Capacity:	Max. 1,800 Destinations (Includes 200 One-Touch Buttons) Max. 5 LDAP Servers
Sending Methods:	E-Mail, I-FAX, SMB, File Server (FTP, IPX, WebDAV), User Inbox, Super G3 Fax (Opt.)
Communication Protocol	
File:	FTP (TCP/IP), SMB (TCP/IP), NCP (IPX), WebDAV
E-mail/I-fax:	SMTP, POP3, I-FAX (Simple, Full)
Data Format	
File, E-mail:	TIFF, JPEG, PDF, PDF (Compact),* PDF (Trace & Smooth),* PDF (OCR),* Encrypted PDF,** Digital Signature PDF (Device,** User***)
I-fax:	B/W: TIFF (MH, MR, MMR) Color: TIFF (Profile-C)


OPTIONAL ACCESSORIES

Super G3 Fax Board-U1

Applicable Line:	Public Switched Telephone Network (PSTN)
Connection Lines:	One-Line (Super G3 Fax Board-U1)
Sending/Original Size:	Statement to 11" x 17"
Recording/Printing Size:	Statement to 11" x 17"

Color UFR II/PCL Printer Kit-Z1

CPU:	Canon Dual Custom Processor (Shared)
Memory:	1.5GB RAM (Std.) (Shared)
Hard Disk Drive:	80GB (Shared)
Supported PDL:	UFR II/PCL 5c/PCL 6
Optional PDL Support:	PostScript 3 Emulation (PS Printer Kit-Z1)
Print Resolution:	
UFR II/PS 3:	2400 dpi Equivalent x 600 dpi
PCL 5c:	2400 dpi Equivalent x 600 dpi
PCL 6:	2400 dpi Equivalent x 600 dpi
Printer Drivers	
UFR II:	Windows® (Windows 2000/XP/ Server 2003/Windows Vista®), Citrix MetaFrame, Macintosh® (OS 10.2.8 or Later)
PCL 5c:	Windows (Windows 2000/XP/ Server 2003/Windows Vista) Citrix MetaFrame
PCL 6:	Windows (Windows 2000/XP/ Server 2003/Windows Vista) Citrix Metaframe
XPS:■	Windows Vista
PS3 (Optional):	Windows (Windows 2000/XP/ Server 2003/Windows Vista) Citrix MetaFrame, Macintosh (OS 10.2.8 or Later)

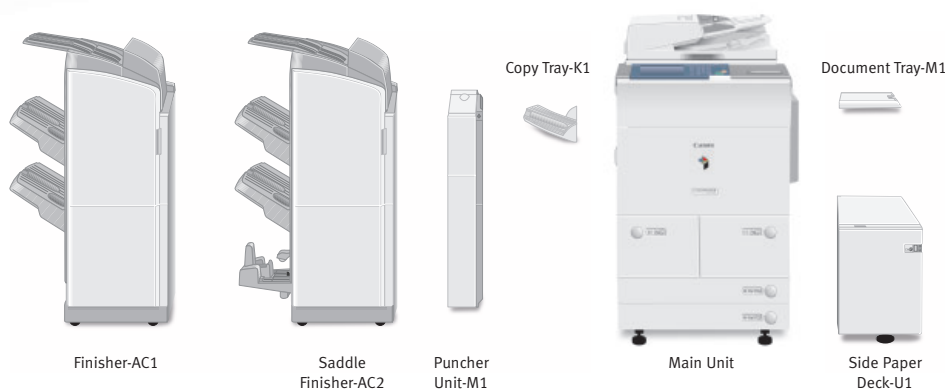

imagePASS-G1 v1.1

Connectable Device:	imageRUNNER C5068/C5058
CPU:	Celeron® M 1.2GHz
System:	System 7e
Memory:	256MB (Std.), 512MB (Max.)
Hard Disk Drive:	80GB
Interfaces (to LAN):	10/100/1000Base-T (RJ-45)
Supported PDL:	Adobe® Postscript® 3, PCL 5c
Print Resolution:	600 dpi x 600 dpi
Utility Software:	Remote Scan/Command WorkStation® for Windows/Command WorkStation for Mac
Options:	256MB RAM, Secure Erase v1.0, Impose v2.6, X-Rite Eye-One

Paper Deck-U1

Paper Size:	Letter
Paper Deck Capacity:	3,500 Sheets (20 lb. Bond)
Dimensions (H x W x D):	22-3/8" x 12-7/8" x 23"
Installation Space (W x D):	37-7/8" x 33-1/2"
Weight:	Approximately 101 lb.

Finisher-AC1/Saddle Finisher-AC2

Number of Trays:	3 Trays
Paper Size	
Standard:	13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive
Non-standard Size:	Irregular Size (3-15/16" x 5-7/8" to 13" x 19")
Paper Weight:	17 lb. Bond to 140 lb. Index
Paper Capacity Per Tray	
Non-collating Tray:	250 Sheets (Letter, Statement-R, Executive) 125 Sheets (13" x 19", 12" x 18", 11" x 17", Legal, Letter-R)
Upper Tray:	1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (13" x 19", 12" x 18", 11" x 17", Legal, Letter-R)
Lower Tray:	2,450 Sheets (Letter) 650 Sheets (13" x 19", 12" x 18", 11" x 17", Legal, Letter-R)
Paper Capacity of Staple Mode	
Upper Tray:	1,300 Sheets/100 Sets (Letter, Executive)
Lower Tray:	650 Sheets /50 Sets (11" x 17", Legal, Letter-R)

Max. Stapling Capacity

Letter, Executive:	50 Sheets (17 lb. to 20 lb. Bond) 30 Sheets (20 lb. to 28 lb. Bond) 2 Sheets (28 lb. Bond to 140 lb. Index)
11" x 17", Legal, Letter-R:	30 Sheets (17 lb. to 20 lb. Bond) 20 Sheets (20 lb. to 28 lb. Bond) 2 Sheets (28 lb. Bond to 140 lb. Index)
Staple Mode:	Corner: 11" x 17", Legal, Letter, Letter-R, Executive Double: 11" x 17", Legal, [†] Letter, Letter-R, [†] Executive

Saddle-Stitching**

Acceptable Paper Sizes:	12" x 18", [†] 11" x 17", Legal, Letter-R
Saddle-stitch Capacity:	15 Sheets (17 lb. to 20 lb. Bond) 10 Sheets (20 lb. to 28 lb. Bond)
Tray Capacity:	25 Sets (1 to 5 Sheets) 15 Sets (6 to 10 Sheets) 10 Sets (11 to 15 Sheets)
Folding:	V-Fold
Dimensions (H x W x D)	
Finisher-AC1:	46-1/4" x 26-1/4" x 25-7/8"
Saddle Finisher-AC2:	46-3/4" x 26-1/4" x 25-7/8"
Installation Space (W x D):	55-1/2" x 33-1/2" (When the Auxiliary Tray is Extended) 60-3/4" x 25-7/8" (When the Optional Puncher Unit-M1 is Attached and the Auxiliary Tray is Extended)

Weight

Finisher-AC1:	Approximately 101 lb.
Saddle Finisher-AC2:	Approximately 161 lb.

Puncher Unit-M1***

Paper Size:	11" x 17", Legal, Letter, Letter-R
Max. Paper Weight:	17 lb. Bond to 140 lb. Index
Punch Type:	3 Holes (Letter, 11" x 17") 2 Holes (Legal, Letter-R)
Punch Waste Tray Capacity:	When approximately 3,000 Sheets of Paper Have Been Punched
Dimensions (H x W x D):	32-3/4" x 4-1/4" x 24-1/2"
Weight:	Approximately 15.9 lb.

Other Optional Accessories

- Encrypted Secured Print Software-C1*
- Barcode Printing Kit-A1
- Web Access Software Kit-E1**
- Universal Send PDF Advanced Feature Set-A1
- Universal Send PDF Security Feature Set-A1
- Digital User Signature PDF Kit-A1
- Secure Watermark-A1
- Super G3 Fax Board-U1
- HDD Data Encryption Kit-B1
- HDD Data Erase Kit-A1
- Voice Guidance Kit-A2*
- Remote Operator Software Kit-A2
- Document Tray-M1*
- Copy Tray-K1**
- Card Reader-C1*
- Card Reader Attachment Kit-C1
- Key Switch Unit-A2
- Braille Label Kit-A1
- ADF Access Handle-A1
- Stamp Unit-B1
- eCopy Suite
- imageWARE Suite
- Access Management System Kit-A1
- Workflow Composer-B2

Footnotes:

- * Requires Universal Send PDF Advanced Feature Set-A1
- ** Requires Universal Send PDF Security Feature Set-A1
- *** Requires Digital User Signature PDF Kit-A1
 - Check with Authorized Canon Dealer for availability
- [†] Not available on imagePASS-G1 v1.1
- ^{††} Available with Saddle Finisher-AC2 only
- ^{†††} Can only be installed with Finisher-AC1 or Saddle Finisher-AC2
 - ▲ Requires UFR II/PCL Printer Kit-Z1
 - ▲▲ Requires UFR II/PCL Printer Kit-Z1 if printing Web pages; requires PS-Printer Kit-Z1 if printing PDF files
 - ◆ Voice Guidance Kit-A2 cannot be installed with Document Tray-M1
 - ◆◆ Cannot be installed if any optional finishers are installed
 - Requires Card Reader Attachment Kit-C1 for installation

Canon

*image*ANYWARE

Adobe and PostScript are registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Command WorkStation is a registered trademark of Electronics for Imaging, Inc. in the U.S. Patent and Trademark Office and/or certain other foreign jurisdictions. Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries. Celeron is a trademark or registered trademark of Intel Corporation or its subsidiaries in the United States and/or other countries. CANON, IMAGERUNNER, the GENUINE logo, and MEAP are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon, Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications and availability subject to change without notice. ©2007 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.



1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

