

# Canon

imageRUNNER®  
3530 / 2830 / 2230



CORPORATE  
SYSTEMS



## ACHIEVE MORE WITHOUT EXHAUSTING YOUR BUDGET

Take command of your office productivity with the Canon imageRUNNER® 3530/2830/2230. At 35 pages per minute, the imageRUNNER 3530 model is an ideal solution for busy, medium-size offices and departments within larger corporations. With the ability to deliver output at 28 and 22 pages per minute, respectively, the compact imageRUNNER 2830/2230 models are perfect for small businesses and workgroups.

What's more, each system offers a modular, flexible design that allows you to build a system to meet your copy, printing, scanning, faxing, and document storage needs as your business dictates. All in an extremely compact, cost-effective system on which your business can depend.

### imageRUNNER 3530/2830/2230 Specifications


Type:	Digital, Multifunction Imaging System
Imaging System:	Laser Electrostatic Transfer
Developing System:	Dry Mono Component
Fixing System:	RAPID Fusing System
Memory	
Standard:	256MB RAM
Optional:	20GB HDD
First-Copy Time	
imageRUNNER 3530:	3.9 Seconds from Platen Glass
imageRUNNER 2830/2230:	4.9 Seconds from Platen Glass
Warm-Up Time:	10 Seconds or Less from Sleep Mode 15 Seconds or Less from Main Power Off 30 Seconds from Main Power Off When Configured With Either Printer Kit
Copy/Print Speed:	35/28/22 ppm (Letter)
Max. Mail Boxes Supported:	100 (with UFR II Printer Kit-E3 or UFR II/PCL Printer Kit-E2)
Max. Copy Reservation:	5 Jobs
Actual Resolution:	600 dpi x 600 dpi
Interpolated Resolution:	1200 dpi x 600 dpi (Copy) 2400 dpi x 600 dpi (Print)
Half-tone:	256 Gradations of Gray
Duplexing:	Standard Automatic Trayless Duplexing
Magnification Reduction/ Enlargement:	25% to 400% (Platen) 25% to 200% (Feeder) (In 1% Increments)
Exposure Control:	Automatic or Manual (9 Levels)
Paper Sources	
Standard:	Dual 550-Sheet Paper Cassettes (1,100 Sheets) Stack Bypass (50 Sheets)
Optional:	Dual 550-Sheet Cassette Feeding Unit (2,250 Sheets Max.)
Multiple Copies:	1 to 999

Paper Weights:	17 lb. to 20 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Stack Bypass)
Network Interface	
Connections:	10/100Base-TX (RJ-45)
Dimensions (H x W x D):	29-7/8" x 22-1/4" x 27-5/8" (761mm x 565mm x 700mm) 34" x 27-5/8"
Installation Space: (W x D):	34" x 27-5/8"
Weight:	Approx. 152 lb. (69kg)
Power Requirements:	120V AC, 60Hz, 10A (3530) 120V AC, 60Hz, 8A (2830/2230)
Power Consumption:	1.35kW (Max.)
Drum:	Organic Photo Conductor (OPC)
Estimated Yield:	85,000 Impressions (3530) 75,000 Impressions (2830/2230)
Maximum Duty Cycle:	80,000/105,000/ 130,000 Impressions/Month
Toner Yield	
imageRUNNER 3530:	24,000 @ 6% Coverage
imageRUNNER 2830/2230:	21,000 @ 6% Coverage

### Optional Accessories

<b>Duplexing Automatic Document Feeder-N1</b>	
Acceptable Originals:	Statement to 11" x 17"
Capacity:	50 Sheets (20 lb. Bond/Letter)
Max. Paper Weight:	13 lb. to 32 lb. Bond
Scanning Speed:	Up to 45 Images per Minute (ipm) From Main Unit
Dimensions (H x W x D):	8-7/8" x 22-1/4" x 21-1/4" (122mm x 565mm x 538mm)
Weight:	Approx. 18.7 lb. (8.5kg)
<b>Cassette Feeding Unit-Y2</b>	
Paper Capacity:	Dual 550-Sheet Paper Cassettes (1,100 Sheets/20 lb. Bond)
Acceptable Paper Sizes:	Statement-R to 11" x 17"
Acceptable Paper Weights:	17 lb. to 20 lb. Bond
Power Source:	From Main Unit
Dimensions (H x W x D):	9-7/8" x 22-1/4" x 27-5/8" (251mm x 565mm x 700mm)
Weight:	Approx. 50.7 lb. (23kg)

<b>Envelope Feeder Attachment-C1</b>	
Copy Speed	
imageRUNNER 3530:	12 cpm (All Envelopes)
imageRUNNER 2830/2230:	10 cpm (All Envelopes)
Acceptable Envelopes:	COM10, DL, Monarch, ISO-B5, ISO-C5, Yougata-4
Feeder Capacity:	Approx. 50 Envelopes or 1-1/4" (31.75mm)
Dimensions (H x W x D):	3-1/4" x 12-1/8" x 11-5/8" (82mm x 306mm x 295mm)
Weight:	Approx. 2.4 lb (1.1kg)
<b>Inner 2-Way Tray-D1*</b>	
Number of Trays:	2 Trays
Tray Capacity	
Lower Output Tray:	250 Sheets (Letter) 100 Sheets (Other Sizes)
Upper Output Tray:	100 Sheets (Letter) 50 Sheets (Other Sizes)
Acceptable Paper Sizes:	Statement to 11" x 17"
Dimensions (H x W x D):	6" x 7" x 21-1/2" (151mm x 176mm x 546mm)
Weight:	Approx. 8.6 lb (3.9kg)
Attachable Accessories:	Copy Tray-J1
<b>Finisher-S1*</b>	
Number of Trays:	1 Tray (Second Tray Optional)
Tray Capacity	
Non-Collate, Collate, Group Mode:	1,000 Sheets (Letter, Statement) 500 Sheets (11" x 17", Legal, Letter-R)
Staple Mode:	1,000 Sheets/30 Sets (Letter) 500 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Tray Capacity	
(With Additional Finisher Tray-B1)	
Non-Collate, Collate, Group Mode:	300 Sheets per Tray (Letter, Statement) 150 Sheets/per Tray (11" x 17", Legal, Letter)

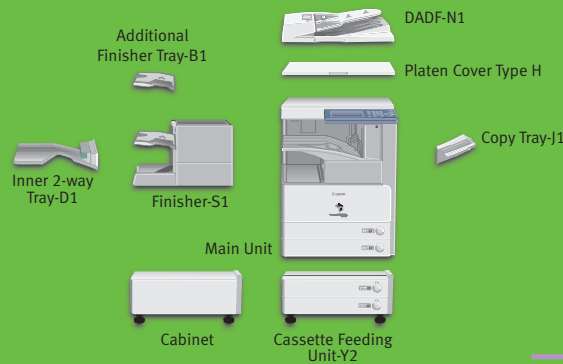

imageRUNNER®  
3530 / 2830 / 2230

### imageRUNNER 3530/2830/2230 Specifications (continued)

Staple Mode:	300 Sheets/30 Sets per Tray (Letter) 150 Sheets/per Tray (11" x 17", Legal, Letter) 150 Sheets/30 Sets (11" x 17", Legal)
Staple Position/Size	
Top Left Corner:	11" x 17" (Landscape), Legal (Landscape), Letter, Letter-R
Top Right Corner:	11" x 17" (Portrait), Legal (Portrait)
Max. Stapling Capacity:	50 Sheets (Letter-17 lb.–20 lb. Bond)
Power Source:	From Main Unit
Dimensions (H x W x D):	11-7/8" x 18-7/8" x 20-1/2" (300mm x 480mm x 520mm)
Weight:	Approx. 26.5 lb. (12kg)
Attachable Accessories:	Additional Finisher Tray-B1 Puncher Unit-R1 Copy Tray-J1

#### Additional Finisher Tray-B1 (Option for Finisher-S1)

Dimensions (H x W x D):	3-1/8" x 7-7/8" x 15-5/8" (80mm x 200mm x 395mm)
Weight:	Approx. 3.7 lb. (1.7kg)

#### Puncher Unit-R1 (Option for Finisher-S1)

Max. Paper Weight:	17 lb. to 32 lb. Bond
Paper Sizes	
2-hole:	Legal, Letter-R
3-hole:	11" x 17", Letter
Punch Method:	Sequential Processing System
Punch Waste Capacity	
2-hole:	2,500 Sheets
3-hole:	1,500 Sheets
Power Source:	From Main Unit
Dimensions (H x W x D):	6-7/8" x 19-7/8" x 5-1/8" (175mm x 505mm x 130mm)
Weight:	Approx. 8.6 lb. (3.9kg)

#### Copy Tray-J1 (Option for Inner 2-Way Tray and Finisher-S1)

Tray Capacity:	150 Sheets (Letter) 75 Sheets (Other Sizes)
Dimensions (H x W x D):	4-3/4" x 13-5/8" x 13-7/8" (120mm x 347mm x 351mm)
Weight:	Approx. 1 lb. (471g)

#### Super G3 Fax Board-Q1

Applicable Line:	Public Switched Telephone Network (PSTN)
Connection Lines:	One
Sending/Original Sizes:	Statement to 11" x 17" (From Document Feeder) Statement to 11" x 17"
Recording/Printing Sizes:	
Transmission Times**	
ECM-MMR:	Approx. 3.2 Seconds
G3MR:	Approx. 13 Seconds
G3MH:	Approx. 13 Seconds
JBIG:	Approx. 2.6 Seconds
Scan Line Density	
Standard:	8 pels/mm x 3.85 lines/mm
Fine:	8 pels/mm x 7.7 lines/mm
Super-fine:	8 pels/mm x 15.4 lines/mm
Ultra-fine:	16 pels/mm x 15.4 lines/mm
Auto Dial Function:	Address Book: 200 Destinations
Image Memory:	Approx. 8,000 Pages

#### UFR II Printer Kit-E3, UFR II/PCL Printer Kit-E2

Processor:	Canon Custom Processor—Shared
RAM:	256MB—Shared
Hard Disk:	20GB—Shared
PDL Support	
UFR II Printer Kit-E3:	UFR II
UFR II/PCL Printer Kit-E2:	PCL 5e, PCL 6, UFR II
Interface Connections	
Standard:	10/100Base-TX(RJ-45), USB 2.0 High-Speed
Network OS:	Windows® 98 <sup>†</sup> /Me <sup>†</sup> Windows 2000/XP Windows NT® 4.0 <sup>†</sup> /Server 2003 Macintosh® OS 10.1.5 or Later Solaris™ 1.1x, 2.5x, or Later Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX™)
Print Drivers	
UFR II:	Windows 2000/XP; Windows Server 2003, Citrix MetaFrame, Macintosh OS X (OS 10.1.5 or Later)
PCL 5e/6:	Windows 98/Me/2000/XP Windows NT 4.0/Server 2003 Citrix MetaFrame

Utility Software:	Network ScanGear Remote UI imageWARE Suite USB Class Driver Fax Driver JBIG ImageViewer Canon LPR 2 Canon NDP5 Gateway Canon Font Manager DSE (Device Status Extension) Address Book Conversion Utility
-------------------	---

#### Other Optional Accessories and Utilities

Platen Cover Type H
Cabinet-P1
Accessibility Handle-A1
Braille Label Kit-A1
Document Tray-J1
Card Reader-C1
Card Sets
imageRUNNER Security Kit-A2
eCopy Suite

<sup>†</sup> Requires 3-way unit.

<sup>\*\*</sup> Approximate 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (MMR, Standard Mode) at 33.6 Kbps modem speed when transmitting to another V.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

<sup>†</sup> UFR II not Supported.



1-800-OK-CANON  
[www.usa.canon.com](http://www.usa.canon.com)

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh is a registered trademark of Apple Computer, Inc. Solaris is a trademark of Sun Microsystems, Inc. in the United States and other countries. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and/or other countries. IPX/SPX is a trademark of Novell, Inc. CANON and IMAGERUNNER are registered trademarks, and RAPID FUSING SYSTEM is a trademark of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners.  
Specifications subject to change without notice.  
Machines shown with optional accessories/equipment.  
©2006 Canon U.S.A., Inc. All rights reserved.

